
Podcast Round

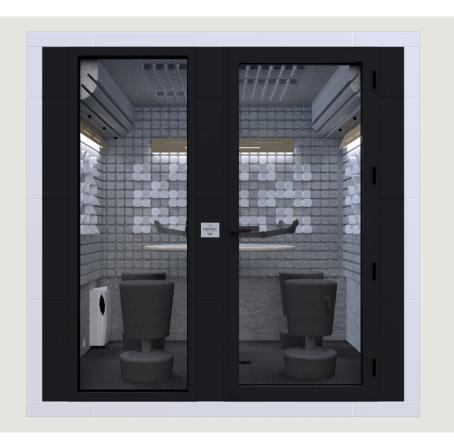

Measurements Outside (WxLxH) 226 x 196 x 226 cm (7,41 x 6.43 x 7.41 ft) Inside (WxLxH) 210 x 180 x 210 cm (6.89 x 5.90 x 6.89 ft) Minimum ceiling height 232 cm (7.61 ft) Weight 1280 kg (2,822 lb) approx Minimum distance from room's walls 5 cm (2 in)

Standard Configuration

Recording equipment Podcast setup (stools are optional)

- · Studiobricks CBTrap3060 bass trap (3 units): Light gray | Recycled PET.
- · Round desk: Ø95 cm (Ø37,4 in) | Height adjustable
- · 1x Yellowtec m!ka System Pole XS (YT3236): Black | Height: 18 cm (7.1")
- · 4x Yellowtec m!ka Mic Arm TV Black (YT3206-XLR): Max length 67 cm (26.4") | Max mic weight: 1,5 kg (3.31 lbs)
- · 1x Yellowtec m!ka System Pole Desktop Mounting Kit (YT3245)
- · SmartFuser diffuser 4 units (32 pieces). Black or white

Exterior color	White (RAL 9016)
Interior color	White (RAL 9016)
Acoustic absorbers (wall)	Studiobricks Eco45 (light gray): 100% recycled PET absorbers (thermally bonded, without chemical binders). Best absorbption ever reducing reverb time thanks to its 45 mm thickness and its 25 kg / m³ density. Absorption class: C (0,60 to 0,75 $\alpha_{\rm w}$) (UNE-EN ISO 11654:1998)

Acoustic absorber (ceiling)

Studiobricks EcotexOne (light gray):

Recycled PET felt based on recycled vegetable cotton bras panel. Thickness (cm/in): 20 mm (+/-0,2) / 0,8 in (+/-0,08). Density: 60 kg/m³ (+/-10%). Absorption class: A (0,90 α_{w}) (BS EN ISO 1654:1997)

Podcast & Vcast





Where viral content borns

Perfect for fostering collaborative content

A distraction-free booth for dynamic conversations between 4 people, the perfect environment for high-quality debates. Great for podcast production companies and for in-house branded content generation.

A portable, sound isolated booth designed for professionals

Our patented system allows for easy assembly and disassembly as needed, so you can take it wherever your podcast ventures, whether for events or your regular professional setup.

Sustainable and health-conscious materials

Our booths are designed with ecofriendly, durable materials, ensuring a secure environment for your health and that of your collaborators. Goodbye foam, hello recycled PET.



Podcast Round

Sound control glass door	90 x 210 cm (2.95 x 6.9 ft), opening to the outside. Aluminum frame with a block of silent laminated safety glass and temperature/ sound edge spacer and air chamber: 3+3+16+5+5 mm (0.1+0.1+0.6+0.2+0.2 in). Acoustic sealing. Textured Anthracite gray.
2x Soundproof ventilation kit	Adjustable intensity levels, extremely quiet and easy filter exchange.
Acoustic cable tunnel	Up to 10 cables
Secondary acoustic cable tunnel	Up to 5 cables
Lighting	3x Studiobricks Light Panel 120 LED light
Carpet	Dark gray (deburred)
Insulation	
Two-way sound isolation	Yes

- · State-of-the-art acoustics achieved by specialized Eco45 acoustic absorbers by Studiobricks
- · Sound control glass door with dark grey aluminium frame and temperature/sound edge spacer. Block of silent laminated safety glass with air chamber 3+3+16+5+5 mm (0.1+0.1+0.6+0.2+0.2 in). With acoustic sealing through lifting up the door handle.

Approximately 46 dB in accordance with ISO 717-1

Structure Wall thickness 8 cm (3.5 in) Floor Floating floor Ecofriendly material Yes (very low emissions)

· NAF MDF (non added formaldelhyde).

Acoustic measurement (dB)


- · Water-based paint, no use of solvents.
- · Structural acoustic insulator made from recycled material (no use of mineral wool).
- $\cdot\,$ Non-invasive wood-glue is used to adhere layers.
- · Eco45 absorbers are made with recycled P.E.T. (thermally bonded, without chemical binders) and fixed tightly with water-based adhesive.


Fire safety	Yes
-------------	-----

- · Roof absorber (recycled PET felt): EN 13501-1+A1: B-s1 do. ASTM E-84-18: Class A
- · Eco45 absorber (recycled PET): Class C s3, d0 (DIN EN 13501-1: 2010)
- · MDF: Optional

Optional Equipment Lacquer color Ask us for other RAL or special finishing (chrome, copper, metallic...) Laminate Black acoustics Yes Special height Yes. Increase or decrease the height of the booth/door. Left-hand opening and/or lockable Yes Ø 95 cm height adjustable desk Yes (from 76 to 108 cm height) Acoustic absorber for glass door/window Yes Active/passive muffler on roof Yes Additional acoustic cable tunnel Yes Additional windows Yes Stool Yes

Measurements





Studiobricks S.L.

(Headquarters and factory)
C/ Segarra, 1, Pol. Ind. La Serra,
Lliçà de Vall, 08185 Barcelona, Spain
Telefon: +34 93 8437459 / +34 605 627 128
info@studiobricks.com
www.studiobricks.com



100% Freedom 0% Disturbances